

WIRELESS MAGNETIC CONTACT SECURITY DETECTOR «CN-Magnetic-Mini»



Installation Guide

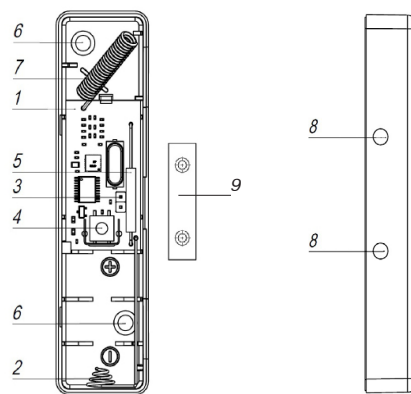


Figure1 – «CN-Magnetic-Mini»

1 General Information

1.1 Wireless magnetic contact security Detector «CN-Magnetic-Mini» (hereinafter, the Detector) is intended for opening or shifting control of doors, windows or other structural elements with transmission of messages to the control panel (hereinafter, CP) via two-way wireless communication by the «CN-Contact-R» protocol.

1.2 Opening or shifting control is fulfilled by built-in magnetic contact state monitoring.

1.3 The Detector operates within 433.05 – 434.79 MHz frequency range. Transmission power does not exceed 10 mW.

1.4 The Detector ensures operation at the main and backup operating frequencies. The changeover to backup operating frequency is fulfilled automatically.

1.5 Radio communication is initiated by the Detector at 10, 15, 30 sec, 1, 5, 10 min intervals assigned in the process of their binding with the CP. Alarm and tamper messages are transmitted immediately.

1.6 The Detector is powered by the one lithium power supply battery CR123A.

1.7 The Detector generates and transmits the following messages:
 - «Norm» – under closed built-in magnetic contact;
 - «Alarm» – under opened built-in magnetic contact;
 - «Tamper» – in the event of case tampering;
 - «Power Supply Low Battery» – under the power supply battery voltage drop over 2.2_{0.2} V.

1.8 The Detector is designed to operate continuously, around the clock.

1.9 The Detector has immunity to electromagnetic interference.

2 Specifications

Table 1

Parameter	Value
Distance between the Detector and the magnet, mm: - when the contact is opened - when the contact is closed	more than 20 less than 5
Operating temperature	From minus 20 to +55 °C
Permissible relative humidity at 25 °C temperature	up to 98 %
Ambient class	Boreal climate*
IP rating	IP30
Dimensions, maximum	97 x 25 x 21 mm
Weight, maximum	0.05 kg
Battery life under normal climatic conditions, disabled indication and assigned radio exchange period up to 30 sec, not less than	60 months
Average service life, not less than	10 years
* – background temperature 15 – 35 °C, relative humidity 25 – 75 %, air-pressure 86 – 106 kPa	

3 Scope of Delivery

Each Detector unit package contains the items listed in Table 2.

Table 2

Name	QNT
Wireless magnetic contact security Detector «CN-Magnetic-Mini»	1 pc.
Master element (magnet)	1 pc.
Master element case	1 pc.*
Screw 3-3x30.016	4 pcs.
Power supply lithium battery CR123A	1 pc.
Wireless magnetic contact security detector «CN-Magnetic-Mini». Installation Guide	1 copy
* – is supplied non-assembled	

4 Design

The Detector consists of a case cover and a base with installed printed circuit board (PCB) (1). In the base openable fixation holes are located in the bottom (6) and in side wall (8). The PCB comprises: battery holder (2), RESET contacts (3), tamper contacts (4), built-in magnetic contact (5) and antenna (7). For built-in magnetic contact management, magnet (9) is used (supplied).

5 LED Indication

The following types of indication are generated by the Detector:

- «Binding» – procedure of logging of the Detector in the CP;
- «Identification» indication is activated by relevant commands received from the CP, remains active during 15 min or until the Detector cover is opened;
- LED indication of the Detector state is activated after the Detector cover is closed and remains active during 15 min under conditions:
 - other LED indication types absence;
 - alarm «Tamper» message is not generated during this time;
 - absence of command from the CP disabling the Detector state indication.

The modes of LED indication are listed in Table 3.

Table 3

The Detector State	Indication	Note
«Binding» procedure	LED indicator periodical blinking green	The Detector logging in the CP
End of the «Binding» procedure	LED indicator lighting red for 2 – 3 sec	–
«Identification» indication	LED indicator alternate blinking red and green	By the relevant command from the CP
«Alarm»	Single-shot LED indicator lighting red for 4 sec	State indication is ON, «Identification» indication is OFF
Communication Quality Appraisal	See sect. Communication Quality Appraising	
«Norm»	LED is OFF	–

6 Binding with the CP

The «Binding» mode is intended for the Detector logging in the CP and service information exchange.

6.1 Prepare the CP in accordance with CP Installation Guide.

6.2 If power supply battery is installed in the holder (2), remove an insulating film.

6.3 Periodical LED indicator blinking green is evidence of binding process.

6.4 In case of mentioned above LED indication absence, short-circuit «RESET» terminals for 2 – 3 sec.

6.5 Successful binding procedure complying is indicated by LED indicator lighting red for 2 – 3 sec.

6.6 The time limit for the binding process of the Detector is 100 sec. To restart the binding procedure, short-circuit «RESET» terminals for 2 – 3 sec.

7 Communication Quality Appraising

7.1 For radio communication quality appraising it is necessary to:

- set the Detector on the assumed place of installation;
- push and then release case tamper.

7.2 After case tamper releasing the Detector generates case tamper alarm message, transmits it via radio communication channel and represents communication quality with CP by LED indication in accordance with the Table 4.

Table 4

LED Indication		Communication Quality Appraisal	Recommendations
Color	Mode		
Green	Three blinks	Excellent	Install the Detector at this place
Green	Two blinks	Good	
Green	One blink	Communication established	Choose another place for installation or use a repeater*)
Red	Four blinks	No communication	

*) – «C.Nord» system repeater

8 Installation

8.1 Arrange the magnet at the side where built-in magnetic contact is located, as it is shown in Figure 1.

8.2 It is not recommended to install the Detector on metal surfaces. In case of installation on metal, use empty case of master element as an insulating layer between surface and magnet.

8.3 A distance between the Detector or magnet and magnetically conductive material should not be less than 10 mm.

8.4 At any possible positions of the monitored structure, the Detector and magnet should not be exposed to any mechanical impacts (compression, blows, etc.).

9 Storage and Transportation

9.1 The Detectors in original package may be transported by any transport facility in closed vehicles over any distances in compliance with the existing shipping rules concerning the respective means of transport.

9.2 After transportation under the conditions different to exploitation conditions, the Detector shall be ready to operate after a maximum of six hours.

10 Manufacturer's Guarantees

10.1 «RIELTA» JSC guarantees conformity of the Detector to its Technical Specifications if conditions of transportation, storage, assembling and operation are observed. The guaranteed storage period is 63 months since the date of manufacturing the Detector.

10.2 The guaranteed period of operation is 60 months since the date of commissioning within the storage period guaranteed.

10.3 For guaranteed maintenance, please contact:

«C.Nord» STCF

Russia, 190020, St. Petersburg,

Obvodny Channel emb., 199-201, build.13, BC «Obvodny Dvor»

Phone: (812) 327-16-36

E-mail: cnord@cnord.ru, support@cnord.ru, www.cnord.ru

Note – Warranty obligations are not applied to power supply battery.

11 Packing Certificate

Wireless magnetic contact security Detector «CN-Magnetic-Mini» has been manufactured in compliance with the active technical documentation and classified as fit for operation and packed by «RIELTA» JSC.

Packing date _____
month, year

Made in Russia

Rev. 2 of 19.12.17
№00410

The Manufacturer: «RIELTA» JSC, www.rielta.com
Russia, 197101, St. Petersburg, Chapaeva str., 17
Phone /fax: +7 (812) 233-03-02, 703-13-60, rielta@rielta.com
Technical support: phone +7 (812) 233-29-53, 703-13-57, support@rielta.ru

By order of «C.Nord» STCF, www.cnord.ru
Russia, 190020, St. Petersburg,
Obvodny Channel emb., 199-201, build.13, BC «Obvodny Dvor»,
Phone: (812) 327-16-36, cnord@cnord.ru
Technical support: support@cnord.ru, http://support.cnord.ru