

Remote Entrance/Exit Button for Access Control System 2E-QDEN90

Product Parameters

Product Size: 60L*42W*28H(mm)

Working Voltage: 12VDC

Working Current: ≤ 12mA

Transmit Power: 10mW

Remote Control Distance: 50M


Working Frequency: 433MHz

Remote Controller Capacity: 30pcs

Joint Remote controller: Press Joint key, then press unlock key or lock key on remote controller, when LED flash, it shows joint successfully.

Remove Remote controller: Only press Joint key continuously, when LED off, then all remote controllers will be removed.

Wiring Diagram

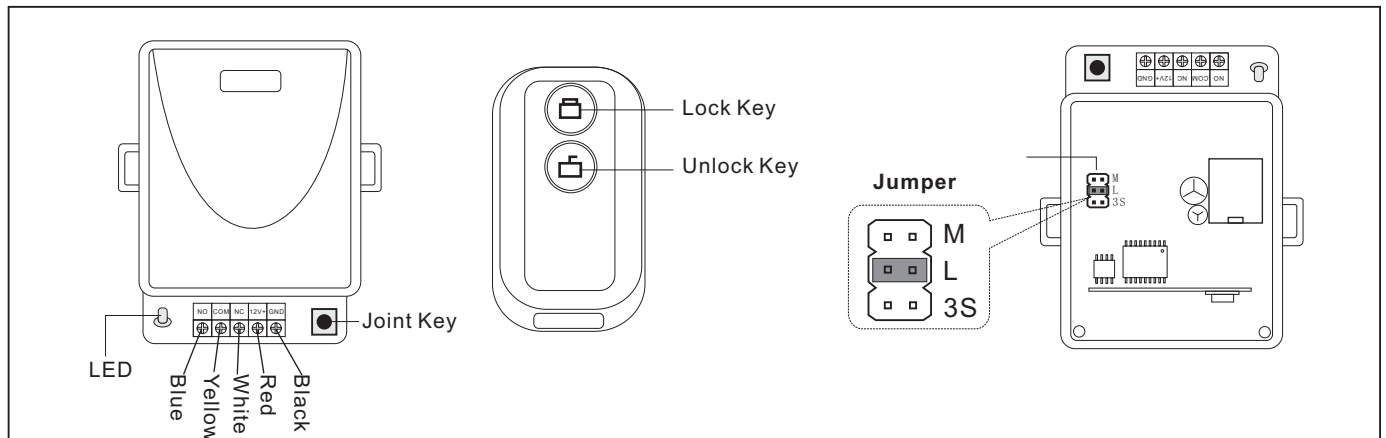

ASF-EN90 have 3 adjustment models, please refer to following information.

1. Jumper on “M” position: when press unlock key on remote controller constantly, door open all the time, after release unlock key, door close, lock key is invalid.
2. Jumper on “L” position: when press unlock key, door normal open, press locked key, door normal close.(Default model)
3. Jumper on “3S” position: when press unlock key, door opened, if user release unlock key, door will be closed.

