



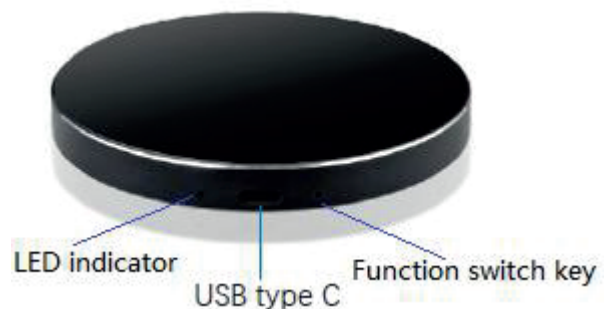

SKU: **OT-LEEUHF72**

## Features

- Phychips PR9200 offer lower cost & higher performance
- Delicate and compact design, more friendly with end users
- Compactly Integrated design supports better deploy / installation / engineering / wiring
- Direct useable fast tag writing software greatly improves efficiency
- USB plug & play
- Simply switch between two working modes, USB read/write mode / USB HID keyboard output mode
- Specially designed antenna, realize no signal blind area
- Widely used in working station, date issuing, retail casher, check points, access control, etc



# Specifications

## Hardware, OS and Firmware Management

API Support	Windows platform – .net
-------------	-------------------------

## Physical Characteristics

Dimensions	90mm (Dia)* 7mm(H)
Weight	0.2Kg
Housing Material	Die- cast aluminum / ABS cover
Visual Status Indicator	Power, Status

## RFID Characteristics

Air Protocol	ISO/IEC18000- 6C / EPC C1Gen2
Chipset	Phychips PR9200
Frequency	USA: 902 MHz- 928MHz (FCC part 15)
	EU: 865- 868MHz (ETSI EN 302208)
	CN: 920- 925MHz (CMIIT)
Supportable /optional	<a href="#">Russian</a> / <a href="#">Japan</a> / <a href="#">Korea</a> / <a href="#">Malaysia</a> / <a href="#">Thailand</a> / <a href="#">other customizable</a>
Output Power	20dBm- 25dBm (±1dBm)
Channel bandwidth	<200KHz
Reading & Writing Range	Reading Range: 0- 10cm      Writing Range: 0- 5cm (According to Tag & Environment)
Working Mode	USB read/write mode, USB HID keyboard output mode
Communication	USB
Integrated antenna	Circular antenna
Power supply	DC 5V/500mA

## Environmental

Operating Temp.	- 20 - +70°C
Storage Temp.	- 40 - +85°C
Humidity	5- 90%non- condensing (+25 )