


Torniquete abatible de medio cuerpo con paleta de acrílico

SKU: OT-TORABACW1P



Technical parameter

Power supply: AC220V±10%V 50±10%HZ.
Input interface: 12V level signal or pulse > 100ms width, pulse signal < 10mA, drive current > 10mA
Communication interface: switch value, optional RS232/RS485
motor: DC24V motor
pass direction: one-way or two-way pass
IP protection level: 42
Relative humidity: ≤90%,non-condensing
open/close time: 1-2s
Power-on system startup time: 3s
Number of passers: 40person/min
Normal service life: 5 million times
Chassis material: standard 304 stainless steel. Thickness: National standard1.2mm ~ 1.5mm
Net channel width size: channel width550mm

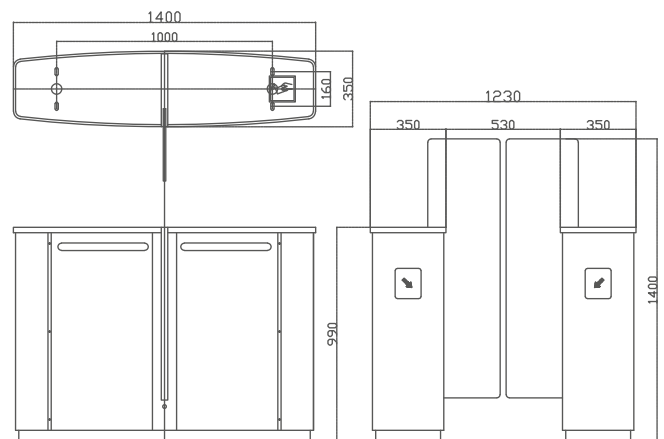

* The appearance of the chassis can be customized according to requirements.